

Livepure Touch 200 Plus

The **Livepure Touch 2000 Plus** is a premium, high-performance water purifier designed to deliver safe, healthy, and great-tasting drinking water for modern homes

Performance Specification	Unit	Value
Purification Capacity	LPH	15 – 20 LPH
RO Membrane Capacity	GPD	75 – 80 GPD
Recovery Rate	%	Up to 25–30%
Bacteria & Cyst Removal	%	Up to 95–98%
Storage Tank Capacity	Liters	7 – 8 Liters
Operating Voltage	V / Hz	220–240V / 50Hz
Power Consumption	Watts	70 – 90W

Purification Technology	—	RO + UV + UF + Mineral
Installation Type	—	Wall mount


The specifications outlined above are normalized performance values based on standard laboratory test conditions. Actual system performance may vary depending on feed water quality, inlet pressure, temperature, installation conditions, and operating environment.

Feed Water TDS up to 2,000 ppm at 25°C (77°F)

Inlet pressure 0.3–0.6 MPa

Stable power supply 220–240V AC / 50Hz

Note: Recovery rate, purification capacity, and TDS reduction may vary depending on feed water characteristics, operating pressure, temperature, and system maintenance.

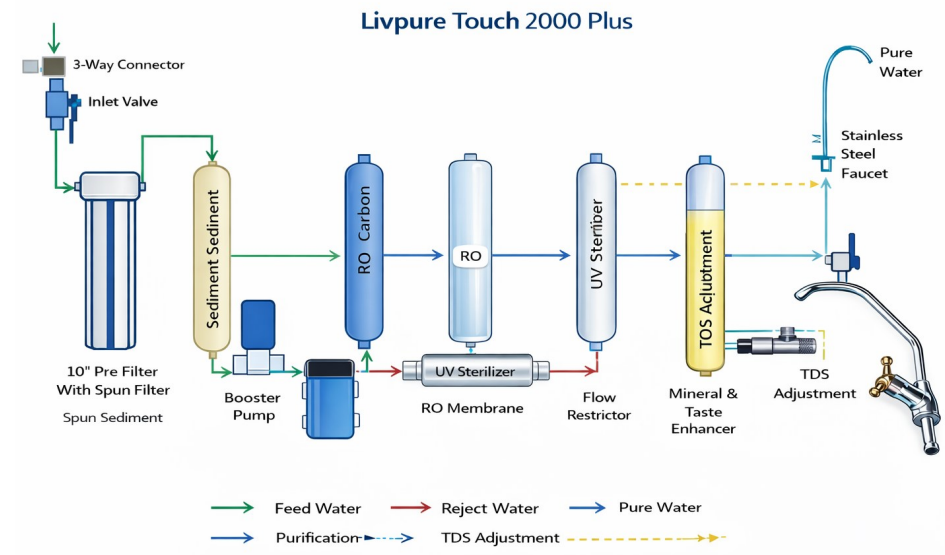

Key Features

- High TDS Reduction RO Membrane
- Wall Mount Installation
- Good Durability

Main Benefits

- Superior Drinking Water Quality
- Reliable Daily Performance

Ideal Application

- Residential Homes & Apartments
- Hospitals & Healthcare Facilities

5 Stage RO Water Purification

- Pre Filter Sediment Cartridge
- Inline Sediment Cartridge
- Inline Pre Carbon Cartridge
- RO Membrane
- Alkaline / Mineral Cartridge
- Aquashine Non Electrical UF Purifier
- UV Light Filter

